

「 210R mono TOPCon half-cell, high-efficiency bifacial module 」

540-565W 0-5W Positive Tolerance



MBB&SMBB Half-cut Cell Technology

New circuit design, lower internal current, and lower Rs loss.



High Power Density

A new generation of monocrystalline products with reduced resistive losses for greater power output.



Mechanical Properties

An aluminum frame in special design for better mechanical properties and more efficient installation.




Excellent Weather Resistance

The solar modules can meet the IEC standard requirements with strong resistant to risks such as salt spray, ammonia gas, dust, snail marks and electric potential induced attenuation.



4 Times 100% EL Detection

Guarantee no micro cracks

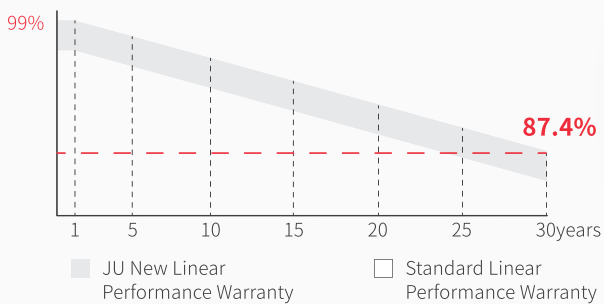

12years Material & process Warranty

30years Linear Performance Warranty

1% Linear Power Degradation in the First Year

0.4% Linear Power Degradation Every Year

PRODUCT QUALITY SYSTEM & CERTIFICATION



ELECTRICAL PROPERTIES

JU-210R-60HBG 120PCS

STC : irradiance, 1000W/m²; cell temperature, 25°C; spectral range, AM1.5

NOCT: irradiance, 800 W/m²; ambient temperature, 20 °C; spectral range, AM1.5; wind speed, 1m/s

	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power - P _{mp} (W)	540	408	545	412	550	416	555	420	560	424	565	428
Open-circuit voltage - V _{oc} (V)	43.48	41.33	43.68	41.52	43.88	41.71	44.08	41.90	44.28	42.09	44.48	42.28
Short-circuit current - I _{sc} (A)	15.83	12.78	15.89	12.84	15.95	12.90	16.01	12.96	16.07	13.02	16.13	13.08
Maximum operating voltage - V _{mp} (V)	36.30	34.01	36.47	34.20	36.64	34.39	36.81	34.58	36.98	34.77	37.15	34.96
Maximum operating current - I _{mp} (A)	14.88	12.00	14.95	12.05	15.02	12.10	15.08	12.15	15.15	12.20	15.22	12.25
Module conversion efficiency - η _m	21.92%		22.13%		22.33%		22.53%		22.74%		22.94%	

ELECTRICAL PROPERTIES VERSUS POWER GAINS FROM THE REAR (TAKING A IRRADIANCE OF 550W)

Power gain	5%	10%	15%
Maximum power - P _{mp} (W)	578	605	633
Open-circuit voltage - V _{oc} (V)	43.88	43.88	43.88
Short-circuit current - I _{sc} (A)	16.75	17.55	18.34
Maximum operating voltage - V _{mp} (V)	36.64	36.64	36.64
Maximum operating current - I _{mp} (A)	15.77	16.52	17.27
Bifaciality	80±5%		

ABSOLUTE RATING

Power tolerance (W)	(0, +5)
Mechanical load	Front5400Pa/Back2400Pa
Maximum system voltage (V)	1500
Maximum series fuse rating (A)	30
Operating temperature	-40~+85°C

MECHANICAL PROPERTIES

Module dimensions(L*W*H)	2172 x 1134 x 30mm
Weight	30.0kg
Cell quantity	120PCS
Cell model	N-type TOPCon Monocrystalline182 x 105mm
Glass	2.0mm AR, High Transmission, Semi-tempered Glass
Frame	Anodized aluminium alloy
Junction box	IP68 Rated
Output line	4.0mm ² , wire length 300mm
Connector	MC4 Compatible



TEMPERATURE CHARACTERISTIC

Temperature coefficient (P _{max})	-0.30% / °C
Temperature coefficient (V _{oc})	-0.24% / °C
Temperature coefficient (I _{sc})	+0.04% / °C
NMOT	43±2°C

PACKAGING

Container	40HQ
PCS / Pallet	36
PCS / Container	720

PRODUCT ASSEMBLY DRAWING(mm)

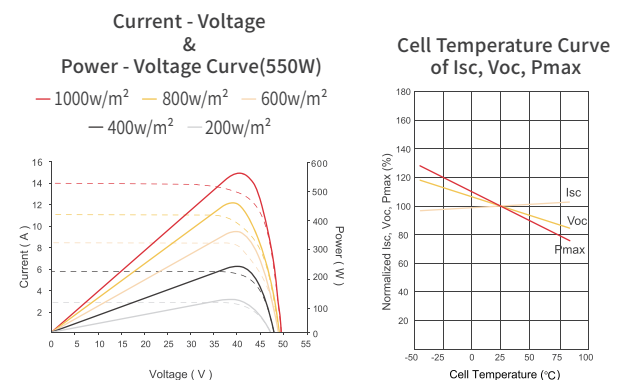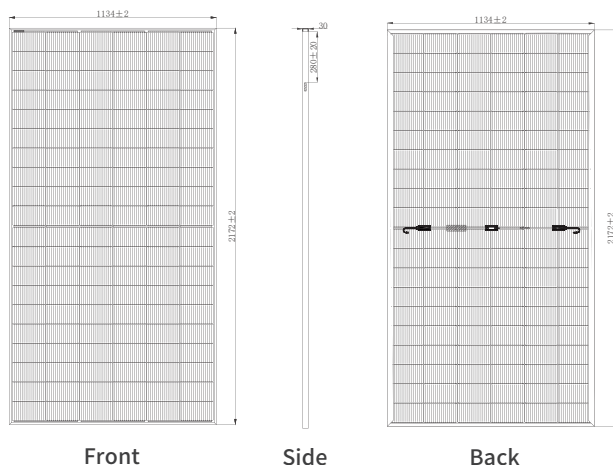

www.jinenusolar.com

jingyou@jinenusolar.com

0086-400-888-3165