



JinenU
Manufacturing for You

「182mm mono PERC half-cell, high-efficiency monofacial,
full black module」

400-410W 0-5W Positive Tolerance



Full black Aesthetic Design

Paired with full-black module frame and backsheet, ensuring high stability and consistency of black aesthetic module in color tone, brightness, and uniformity.



MBB&SMBB Half-cut Cell Technology

New circuit design, lower internal current, and lower Rs loss.



High Power Density

A new generation of monocrystalline products with reduced resistive losses for greater power output.



Mechanical Properties

An aluminum frame in special design for better mechanical properties and more efficient installation.




4 Times 100% EL Detection

Guarantee no micro cracks



Excellent Weather Resistance

The solar modules can meet the IEC standard requirements with strong resistant to risks such as salt spray, ammonia gas, dust, snail marks and electric potential induced attenuation.

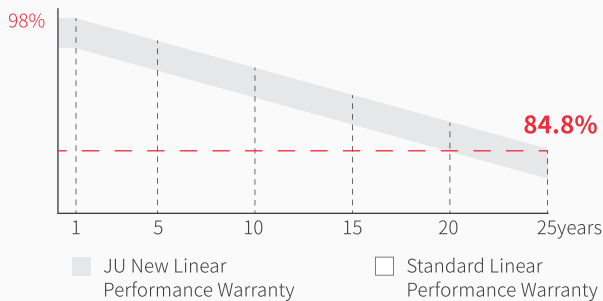

12years Material & process Warranty

25years Linear Performance Warranty

0.55% Linear Power Degradation

PRODUCT QUALITY SYSTEM & CERTIFICATION



- IEC 61215 / IEC 61730
- ISO 9001: 2015 Quality management system
- ISO 14001: 2015 Environmental management system
- ISO 45001: 2018 Occupational health and safety management system

ELECTRICAL PROPERTIES

JU-182M-54H (Black) 108PCS

STC : irradiance, 1000W/m²; cell temperature, 25°C; spectral range, AM1.5

NOCT: irradiance, 800 W/m²; ambient temperature, 20 °C; spectral range, AM1.5; wind speed, 1m/s

	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power - P _{mp} (W)	400	298	405	302	410	305
Open-circuit voltage - V _{oc} (V)	37.18	34.95	37.33	35.09	37.68	35.42
Short-circuit current - I _{sc} (A)	13.39	10.85	13.44	10.89	13.59	11.01
Maximum operating voltage - V _{mp} (V)	31.42	29.22	31.55	29.35	31.84	29.61
Maximum operating current - I _{mp} (A)	12.74	10.21	12.84	10.29	12.88	10.31
Module conversion efficiency - η _m	20.48%		20.74%		20.99%	
Power tolerance (W)			(0, +5)			
Mechanical load			5400Pa			
Maximum system voltage (V)			1500			
Maximum series fuse rating (A)			25			
Operating temperature			-40~+85°C			

STRUCTURAL CHARACTERISTICS

Module dimensions(L*W*H)	1722 x 1134 x 30mm
Weight	21kg
Cell quantity	108PCS
Cell model	PERC Monocrystalline182 x 91mm
Glass	3.2mm AR, High Transmission, tempered glass
Frame	Anodized aluminium alloy
Junction box	IP68 Rated
Output line	4.0mm ² , wire length 300mm
Connector	MC4 Compatible



TEMPERATURE CHARACTERISTIC

Temperature coefficient (P _{max})	-0.35% / °C
Temperature coefficient (V _{oc})	-0.27% / °C
Temperature coefficient (I _{sc})	+0.05% / °C
NMOT	45±2°C

PACKAGING

Container	40HQ
PCS / Pallet	36
PCS / Container	936

PRODUCT ASSEMBLY DRAWING(mm)

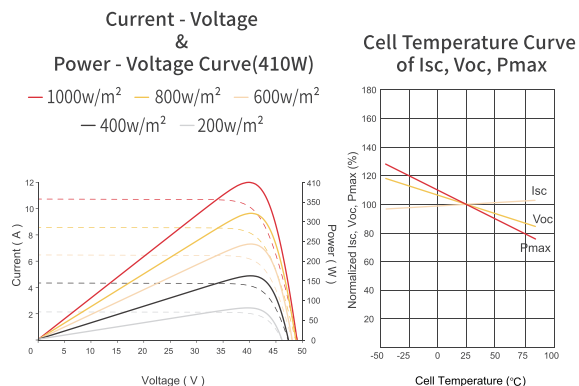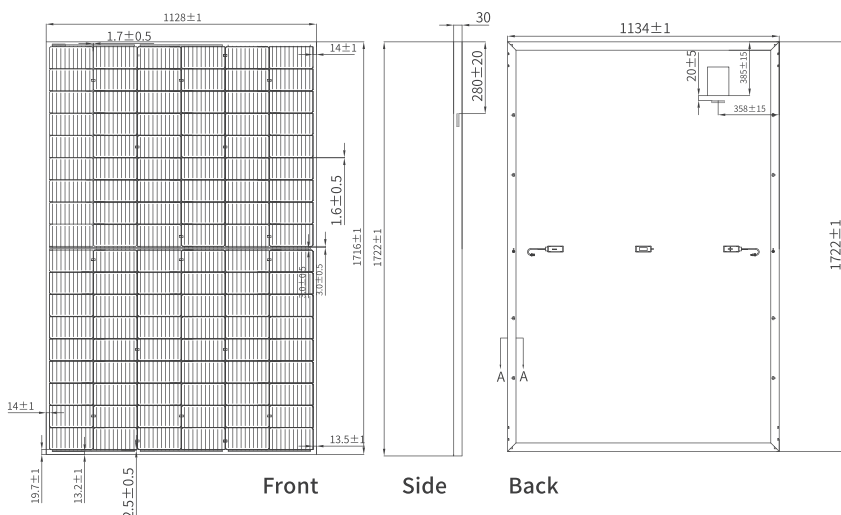

Focus on Solar Module Customization(OEM/ODM)
Service the Industry with 20GW



www.jinenusolar.com



jingyou@jinenusolar.com



0086-400-888-3165



Zibo JinenU Solar Technology Co., LTD
 3005, Silk Road, Zhoucun District, Zibo, Shandong, China
Taizhou JinenU New Energy Co., LTD
 568, Taizhou Road, Jiangyan District, Taizhou, Jiangsu, China
Tai'an JinenU Solar Co., LTD
 58 Zhongtianmen Street, High-tech Zone, Tai'an, Shandong, China